


# DP-10 SERIES / DP-15 SERIES

Maximum Capacity 22 l/min  
Port Size 3/8" (10 mm)

Maximum Capacity 28 l/min  
Port Size 1/2" (15 mm)

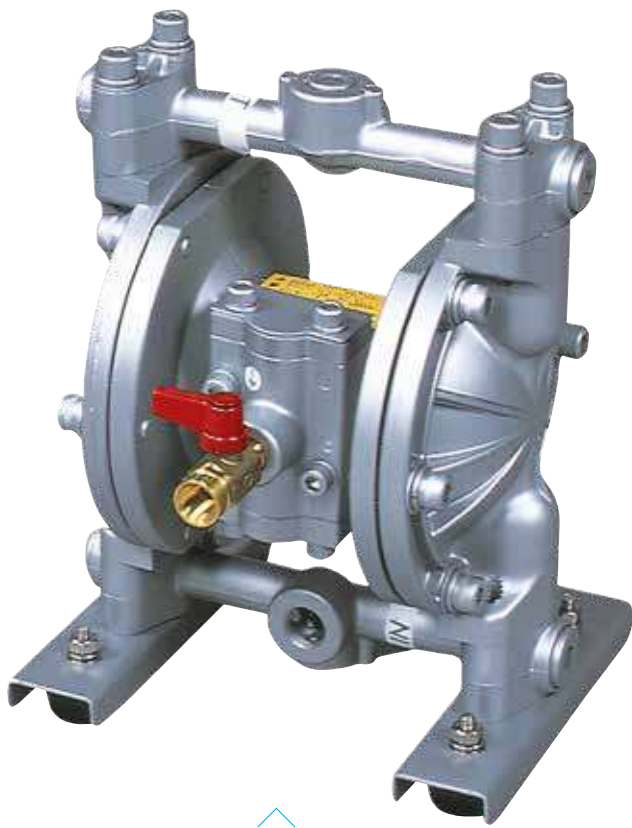

## DP-10 Aluminum

Dimensions:  
186 mm W x 241 mm H  
Net Wt.: 3,6 kg  
Shipping Wt.: 4, 5 kg

## DP-10 Polypropylene

Dimensions:  
196 mm W x 196 mm H  
Net Wt.: 3,1 kg  
Shipping Wt.: 4,0 kg



## DP-15 Polypropylene

Dimensions:  
246 mm W x 297 mm H  
Net Wt.: 4,0 kg  
Shipping Wt.: 5,4 kg



## DP-10 Stainless Steel

Dimensions:  
186 mm W x 241 H  
Net Wt.: 5,3 kg  
Shipping Wt.: 6,2 kg



# DP-10 / DP-15 SERIES SPECIFICATIONS

## DP-10 Port Dimensions

Intake & discharge connection:

Polypropylene (PPG)	3/8" 10 mm Female Rc
Aluminum (ADC-12)	3/8" 10 mm Female Rc
Stainless Steel (316)	3/8" 10 mm Female Rc

## DP-15 Port Dimensions

Intake & discharge connection:

Polypropylene (PPG)	1/2" 15 mm Female Rc
Groundable Acetal (POM)	1/2" 15 mm Female Rc

## Air Inlet/Exhaust

Air inlet (incl. ball valve):	1/4" 5 mm Female Rc
Air exhaust (incl. silencer):	3/8" 10 mm Female Rc

## Air Supply Pressure (All Models)

1,4 – 7 Bar (0,14 – 0,7 MPa)

## Discharge Volume Per Cycle

DP-10: 76 cc

DP-15: 93 cc

## Maximum Cycles Per Minute

All diaphragms: 300

## Maximum Size Solid

1,0 mm (1/32")

## Maximum Dry Suction Lift

All diaphragms: 3 m

## Air Motors

Standard: Aluminum


Optional: Teflon®-coated, or Electroless Nickel Plate

## Notes:


Hytrell®-fitted pumps include Buna-N wetted o-rings.

Santoprene®-fitted pumps include EPDM wetted o-rings.


## DP-10 Series Performance Curve

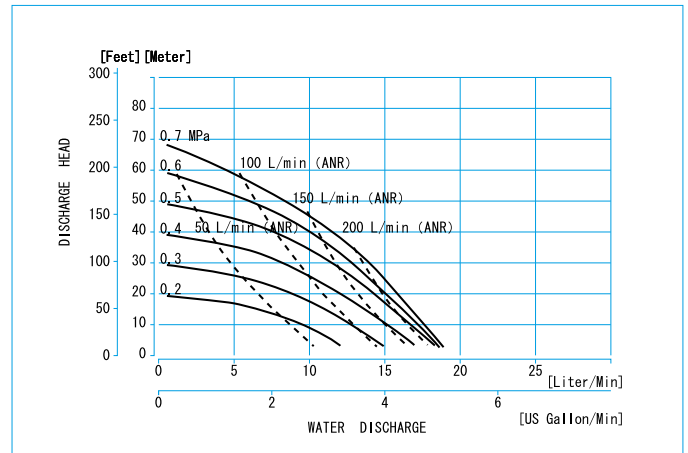

## DP-15 Series Performance Curve

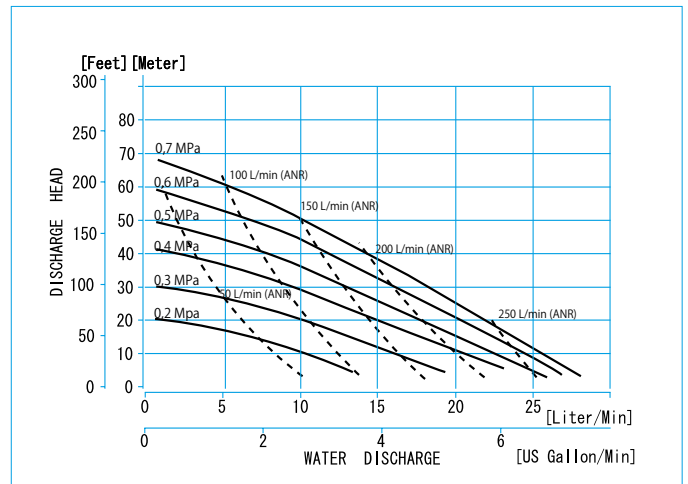

## Model Number Nomenclature

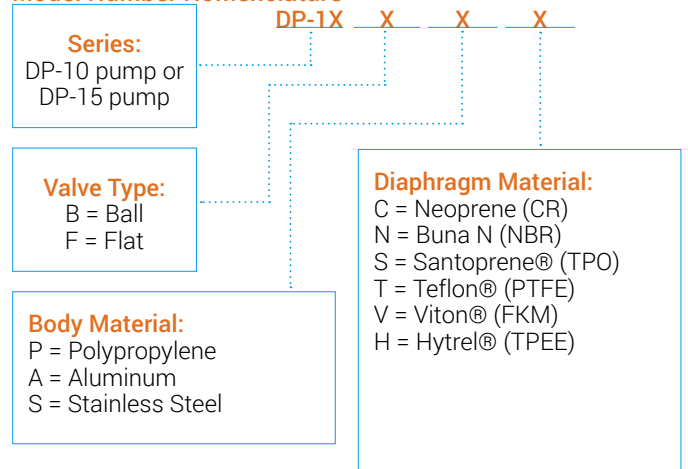

\* Ball valves optional for PPG pumps DP-15 only  
Additional options listed on page 35.